



FRONT VIEW

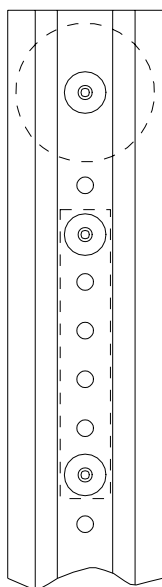

BACK VIEW

# DELINEATOR POST NUMBERING

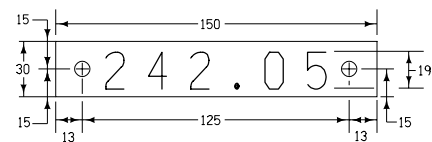

D10-4A

Markers for each 80.465m (0.05mile) will be placed on the mainline delineator posts as illustrated.

The markers on the post shall consist of a number representing the proper mile. The numerals shall be on a non-reflectORIZED pressure-sensitive face material. The non-reflectORIZED sheeting shall comply with specifications developed by the manufacturer of the reflective sheeting used in the fabrication of the reflectORIZED mile marker panels.

The markers shall be applied to properly treated aluminum blanks having a thickness of 1.6mm in a manner specified by the sheeting manufacturer or by a method which shall produce an equivalent result.

The aluminum marker shall be fastened to the delineator post with aluminum pull-through, hollow, blind rivets with a diameter of 3.2mm and a brazier head with a grip range of 3.2mm to 6.4mm.

The holes in the marker panel shall be drilled with a No. 30 drill (3.3mm diam.).

The numerals shall be black on a white background.

The aluminum markers will be required for delineators on either side of the roadway (i.e. for both directions of travel).

All dimensions are given in millimeters unless noted.

METRIC VERSION		
	<b>STANDARD ROAD PLAN</b>	
	<b>RD-58</b>	
	REVISION: NEW	REVISION NO. NEW
		REVISION DATE 04-15-03
APPROVED BY DESIGN METHODS ENGINEER		
DELINEATOR POST NUMBERING		